Part Number: **TC402-41 - 1RU, 24 Port**
TC402-42 - 2RU, 48 Port

Description: **RJ45, Category 6 UTP Patch Panel with cable support bar, 19" rack mount**

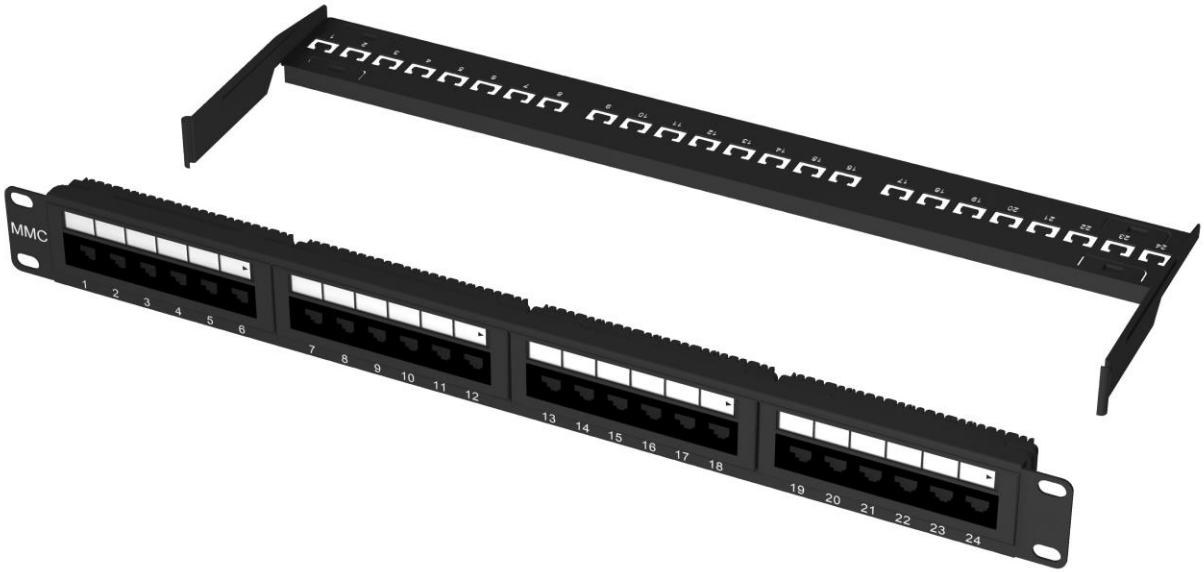

Use / Application:

The Hypaconnect HY Series Category 6 UTP Patch panel is easy to install and terminate in any network environment. The rear cable support bar provides a tie down and cable management point for LAN cable and the front patching fields contains a labelling area for identifying connections. Available as either a 1RU, 24Port or 2RU, 48 port versions, the HY patch panel series provides great flexibility for your network. This patch panel is suitable for unshielded cable (U/UTP), which is terminated onto the patch panel via a standard IDC termination tool.

Benefits & Features:

- Category 6 unshielded, loaded patch panel
- Available in 1 RU 24 port or 2 RU 48 port
- Suitable for 19'' mounting formats
- Rear cable management support bar
- IDC connectors for easy punch down termination
- Supports 23AWG cable
- Colour coding for TIA 568 A or B usage
- Steel powder coated panel
- Meets or exceeds ISO/IEC 11801 Ed2, EIA/TIA 568-C
- ACMA compliant – RCM tick
- Class E, 250MHz, 1 Gigabit

Performance:

EIA/TIA	568.C.2 CAT6
ISO/IEC	ISO 11801 Ed2.2 Class E
EN	EN 50173-1:2011 Class E

Properties:

CONNECTOR	
Contact	Gold plated Bronze / Nickel
IDC	110 IDC Phosphor Bronze
Contact resistance	< 20mΩ IEC 60512-2-1
Voltage	≥ 1000V DC contact to contact
Cycles of insertion	1000 nom
Operating voltage	≤ 72V DC

Ordering Information:

Part Number	Description
TC402-41	Category 6 unshielded 19'' loaded patch panel 24 ports 1RU with rear cable management support bar, HY series
TC402-42	Category 6 unshielded 19'' loaded patch panel 48 ports 2RU with rear cable management support bar, HY Series

Disclaimer:
Warren and Brown Technologies P/L reserves the right to alter without notice DESIGN, SPECIFICATIONS, PACKAGING, etc